


# INTERNATIONAL® CUB CADET® LAWN AND GARDEN TRACTOR OFFERS MORE THAN 60 WORK ATTACHMENTS



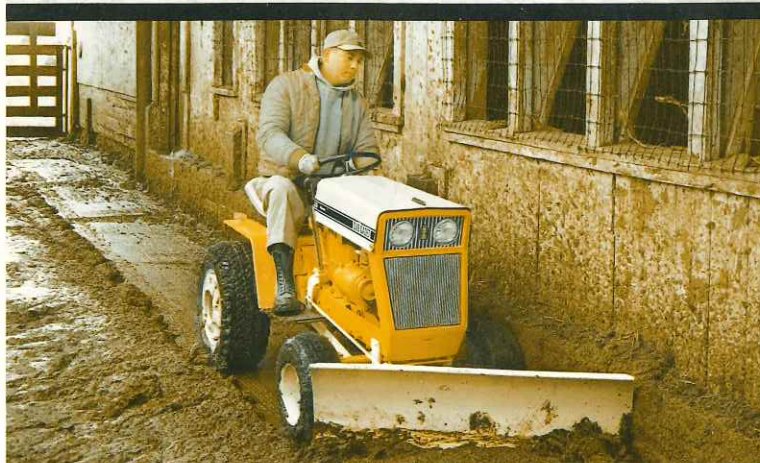

## MORE FOR YOUR MONEY!

Keep your Cub Cadet tractor working all year around with the new Quick-Attach line of implements. Now, you can mow, landscape, plow, sweep, spray, cultivate, seed, fertilize, clear snow, haul — and do dozens of jobs with Cub Cadet tractors. You even have an auxiliary source of electric power. Cub Cadet is built like the big tractors


with full-length channel steel frame, I-section front axle, massive differential housing and other power-plus features. Your choice of 7, 10, or 12 horsepower — 3-speed transmission or hydrostatic one-lever control of direction, braking, and infinite speed selection. See your Cub Cadet dealer for complete information and specifications.

## MOWING

### REEL MOWER...TURFMASTER

Mows a 60-in. wide swath. Cutting height adjusts 1 to 2 1/8-in. Includes three 22-in. cutting reels, 6-in. diameter. Timken tapered roller bearings. 5 alloy steel knives on each reel. 3.50 x 11.25 Flex-Tread drive wheels, exceptionally soft and easy on turf. 5-gang, 98-in. wide swath mower also available.

Manufactured by  
DILLE & McGUIRE MANUFACTURING COMPANY  
RICHMOND, INDIANA 47374

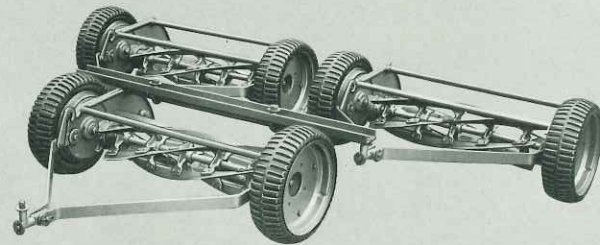

### REEL MOWER—SUN-MASTR®

Trailing; cuts 60-in. swath. Three 21-in. cutting reels each with 5 crucible steel cutting knives, are 6-in. in diameter; Timken tapered roller bearings. 11 x 3-in. rubber-tired wheels are solid rubber with slip-proof tread. Gang frames are heavy duty 3-inch channel iron with patented spring arrangement for 4-way controlled action.


Manufactured by THE SUN-MASTR CORPORATION  
OLATHE, KANSAS 66061  
Order Model No. T-321WC



### REEL MOWER—YARD-MAN

Trailing, 3 and 5-gang reel-type mowers cut 57-in. and 93-in. swaths respectively. 1/2-in. to 2 1/4-in. adjustable cutting height. 9 1/2 x 3-in. diamond tread drive wheels have oil impregnated bronze bearings. 5-lb. wheel weight hub caps give additional traction.

Manufactured by YARD-MAN INCORPORATED  
1410 W. GANSON ST., JACKSON, MICHIGAN 49202  
Order Model No. 1020-3, designating 3 or 5 gangpower

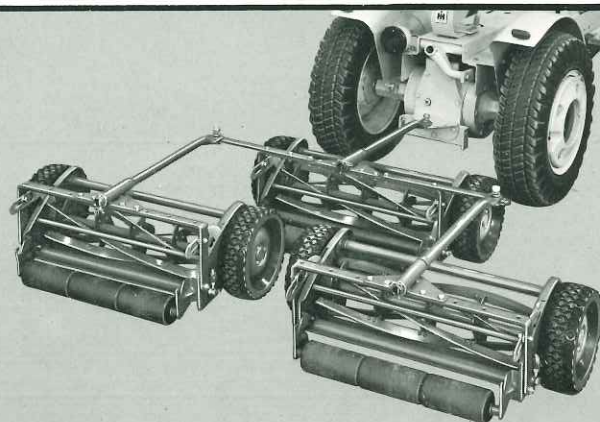


## MOWING (Continued)

### GANG REEL MOWER—ROXY

6 models of trailing 3 and 5 gang reel mowers cut 60 to 132-inch swaths. Shown is 80-in. model 1000-3G. High carbon blades and bed knives, cast iron wheels with semi-pneumatic tires, chain drive, Timken tapered bearings, steel rollers.

Manufactured by ROXY-BONNER, INC.  
2000 PIONEER ROAD, HUNTINGDON VALLEY, PA. 19006

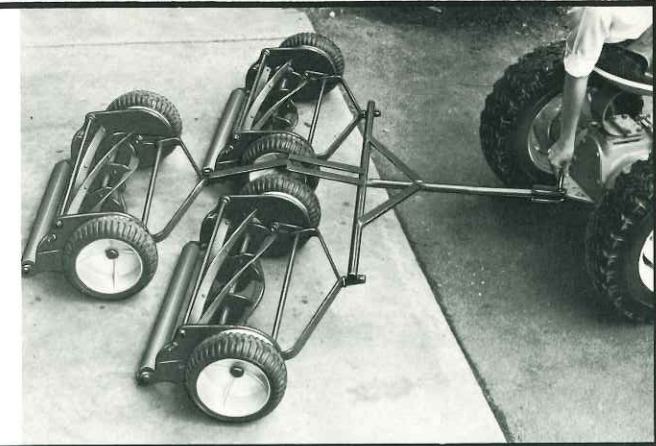

### 3-GANG REEL MOWER—ROXY-BONNER

Two of the mowers are mounted to front end of tractor and the third is attached to the tractor hitch. The front mowers pivot sharply for tight turns. Cutting width is 60-in. Front-mounted mowers also help to minimize wheel tracks.


Manufactured by ROXY-BONNER, INC.  
2000 PIONEER ROAD, HUNTINGDON VALLEY, PA. 19006



### SICKLE-BAR MOWER—HABAN

Heavy duty sickle bar mower cuts heavy grass, weeds, brush and trims hedges through 135° cutting arc. Mows 4-ft. swath with belt drive from tractor PTO. Full floating action . . . vertical adjustment made by hand lever. All steel construction with ball bearing pulleys, high-carbon shear knives. Tractor equipment required: front PTO implement clutch.


Manufactured by HABAN MANUFACTURING CO.  
RACINE, WISCONSIN

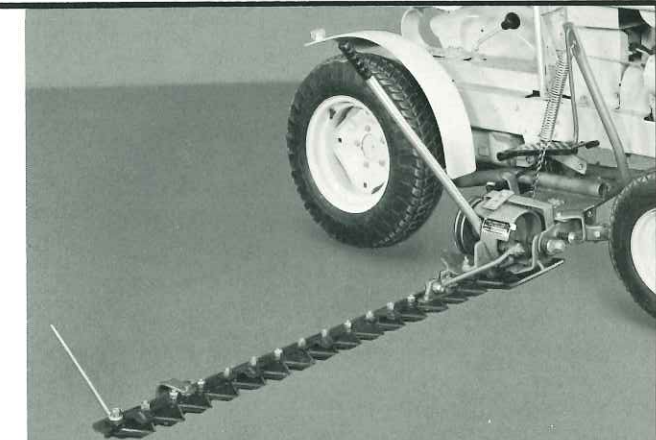

### SICKLE-BAR MOWER—JIFFY BALLING

Front-mounted, this mower is driven from tractor's front power take-off. It is available in 36-in. or 42-in. widths. Mower has "floating action" which follows contour of ground regardless of position of tractor. (Engine should be run at half-throttle according to owner's manual.)

Manufactured by JIFFY BALLING CO., INC.  
ROCKFORD, MINNESOTA 55373

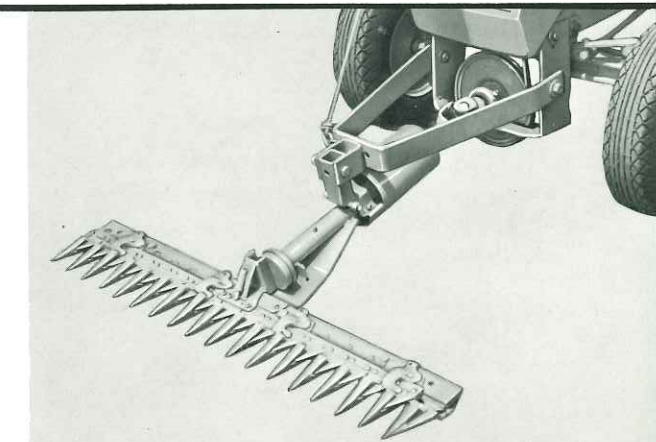




# LAWN CARE

## LAWN ROLLER—KENSICO

32-in. wide. Heavy gauge steel drum is 24-in. in diameter, carried on roller bearings. Scraper blade provides self-cleaning action. Any desired amount of water ballast can be added up to a maximum of 550 lb.

Manufactured by KENSICO MANUFACTURING CO., INC.  
HUBBELLS ROAD, MOUNT KISCO, NEW YORK 10549

Order Model No. 525

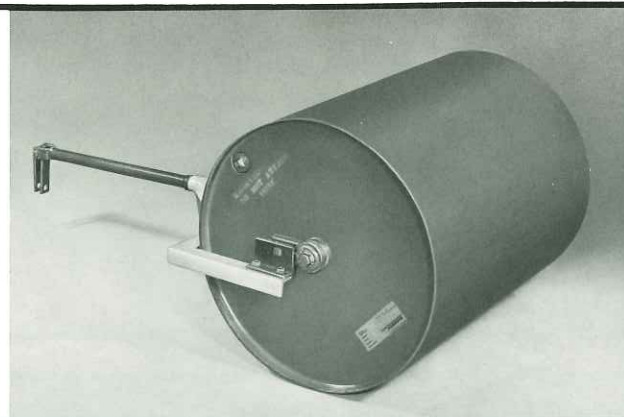


## LAWN ROLLER—GREENLAWN

Powerlawn water ballast lawn roller is a heavy-duty 34-in. roller with 1¼-in. thru-mounted axle. Roller is 24-in. in diameter and weighs 750 lbs. with water ballast tank full. Roller may be purchased separately or as a conversion unit to fit into the Model PL-TW aerator frame. Transport wheels optional.

Manufactured by GREENLAWN AERATORS, INC.  
P. O. BOX 229, GREENVILLE, PENNSYLVANIA 16125

Order Model No. PL-LR (without transport wheels)  
Order Model No. PL-LRTW (with transport wheels)

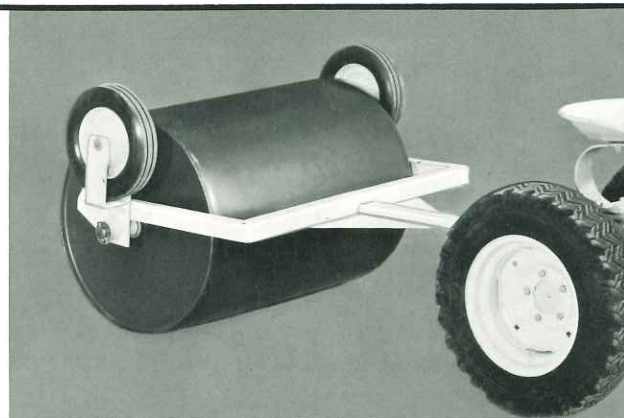


## LAWN ROLLER—OHIO

Trail-behind lawn roller unit has 36-inch width. Empty weight is 120 lbs.; when filled with water, it weighs 600 lbs. Adjustable scraper keeps drum clean. Drum can also be filled with sand instead of water.

Manufactured by OHIO STEEL FABRICATORS  
567 HUDSON STREET, COLUMBUS, OHIO

Order Model No. 10T

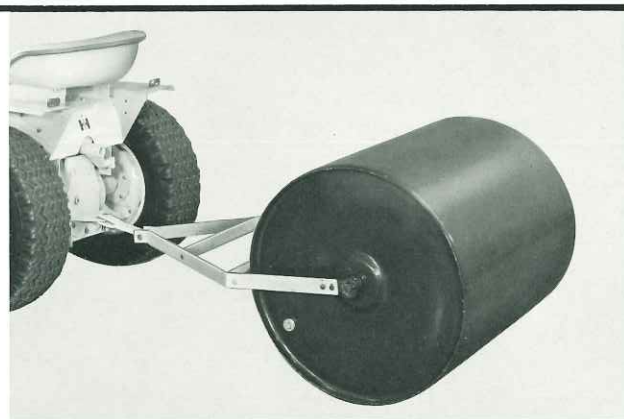


## LAWN ROLLER—HARRIS

Trail-behind unit has rolling width of 36 inches. Adjustable scraper provided to keep drum surface clean. Can be filled with water or sand to add weight. Drum weight empty: 90-lb. Water-filled: 450-lb. Sand-filled: 675-lb.

Manufactured by HARRIS FABRICATING COMPANY  
YOUNGSTOWN, OHIO

Order Model No. 1836

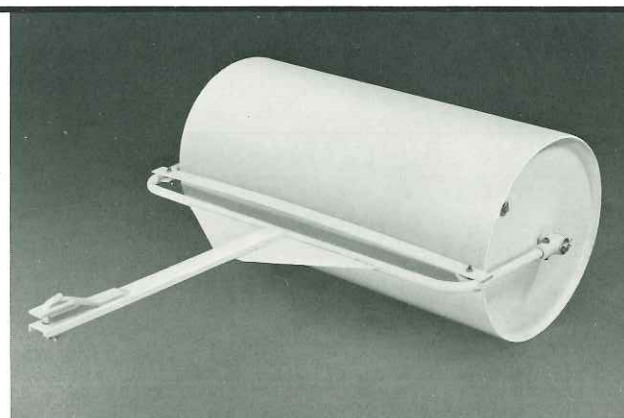


# LAWN CARE (Continued)

## LAWN AERATOR—GREENLAWN

38-in. wide, with two 18-in. diameter drums, aerates path 24-in. wide. Each drum carries 14 tube-type teeth which produce an 8-in. by 8-in. hole pattern. Penetrates to 2½-in. depths. All steel construction, weighs 155-lbs.; 350-lbs. with water added to drums. Transport wheels also available.

Manufactured by GREENLAWN AERATORS, INC.  
P. O. BOX 229, GREENVILLE, PENNSYLVANIA 16125

Order Model No. T-18 (without transport wheels)  
Order Model No. T-18-TW (with transport wheels)

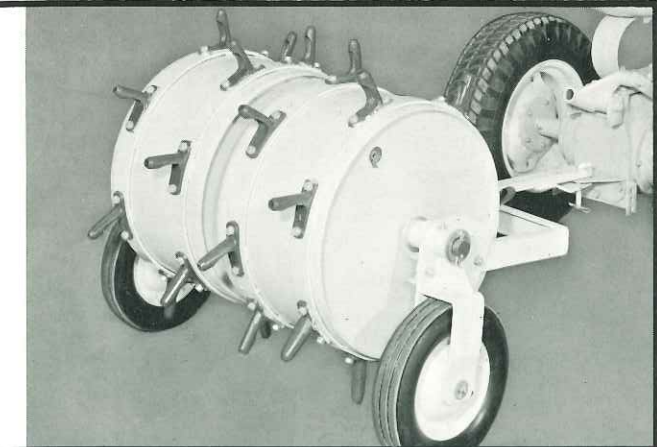

## SPIKER AERATOR—GILL

Eighty holes 1¼-in. deep penetrate the soil or turf on every revolution of the 36-in. wide roller. Roller diameter, 5½-in. O.D.; weight, 83-lbs. Additional weight may be added to the weight box. Trail-behind universal hitch.

Manufactured by GILL MANUFACTURING COMPANY  
2032 S. TRYON ST., CHARLOTTE, NORTH CAROLINA 28203



## SPIKER AERATOR—KENSICO

32-in. wide, with 16 replaceable tempered spike disks. Adjusts to provide either smooth or rough spiking action. Axle rolls smoothly on roller bearings. Weight pan.

Manufactured by KENSICO MANUFACTURING CO., INC.  
HUBBELLS ROAD, MOUNT KISCO, NEW YORK 10549

Order Model No. 425



## SPIKER AERATOR—OHIO

Trail-behind aerator has a spiking width of 36 in. There are 18 discs, each with 17 spikes. Depth of penetration in soil can be controlled by ballast. Unit can also be used for creating loose seed beds.

Manufactured by OHIO STEEL FABRICATORS  
567 HUDSON STREET, COLUMBUS, OHIO

Order Model No. 36





**SPIKER AERATOR—HARRIS**

Trail-behind unit has a spiking width of 30 inches. 15 discs, having sixteen spikes on each disc, penetrate soil to create loose seed bed, to aerate, etc. Spike depth penetration is controlled by the weight of the ballast that is used.

Manufactured by HARRIS FABRICATING COMPANY  
YOUNGSTOWN, OHIO  
Order Model No. 25



**VACUUM SWEEPER—E-Z-RAKE**

Grass, leaves and light debris are drawn from mower through a boot attached to the mower and a 6-inch diameter vacuum hose, back to an impeller which blows it through another 6-in. hose into a large bag towed behind tractor. 4-hp Kohler engine vacuum power plant. Bag can be transported on sulky or International 2 trailer. Unit can be used on International 38-, 42-, or 48-in. mower.


Manufactured by E-Z-RAKE, INC.  
ACTON, INDIANA 46259  
Order Model No. 40



**PICK-UP SWEEPER—MARS**

Trail-behind sweeper brush is powered by a 3-horsepower air-cooled engine. Sweeping width is 4 feet. Unit has 7 cubic foot capacity (recommended when sweeping heavy materials such as dirt, sand, etc.) hopper. 14 cubic foot capacity hopper is optional for collecting leaves, grass and other light debris.


Manufactured by MARS INDUSTRIES, INC.  
5209 W. BROADWAY, MINNEAPOLIS, MINNESOTA  
Order Model No. 444AF

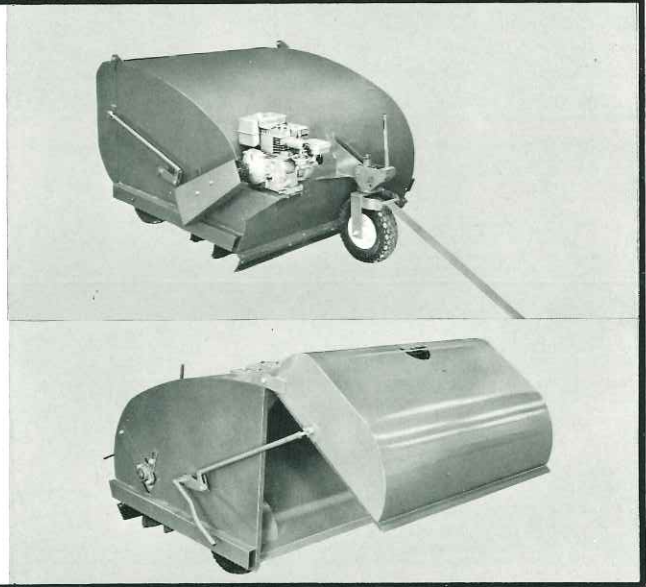

**LAWN SWEEPER—LAMBERT**

31-in. wide, with 8½-bushel capacity lift-out hamper. Standard baler attachment almost doubles capacity. Sweeping height adjustable within 3-in. range. Curved brush has "funnel action" for cleaner sweep. All steel frame. 1¾-in. wide, semi-pneumatic tires. Attachment available: Wind apron.

Manufactured by LAMBERT INCORPORATED  
519 HUNTER AVENUE, DAYTON, OHIO 45404  
Order Model No. BT-331-B

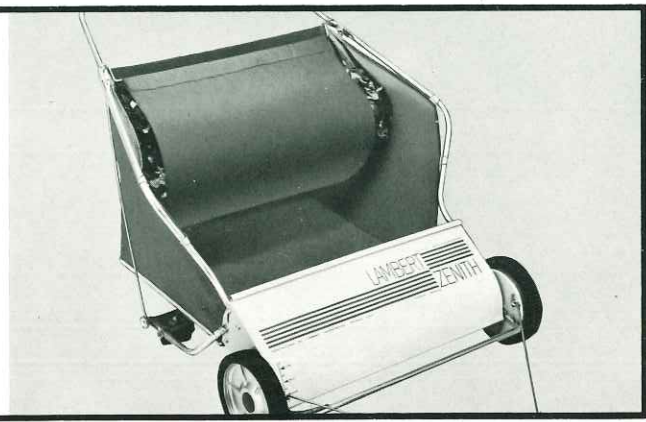

**LAWN SWEEPER—PARKER**

41-in. wide, sweeps a 30-in. swath into a 12-bu., heavy-duty canvas hamper. Can be dumped by operator from seat position. Easily maneuvered, sweeper has swivel caster wheels mounted on tubular frame. Anti-wrap reel.


Manufactured by PARKER SWEEPER COMPANY  
SPRINGFIELD, OHIO  
Order Model No. TE-6430A



**GANG LAWN SWEEPER—PARKER**

Has 100-in. sweep width with 48-bu. capacity. Designed for sweeping large estates, parks, institutional grounds. Hitch attaches to any vehicle. Unit can be disassembled for storage. Each hopper can be removed, or dumped to either side by one man. Brushes of steel-back glassine fibre. Anti-wrap reel.


Manufactured by PARKER SWEEPER COMPANY  
SPRINGFIELD, OHIO  
Order Model No. EM-68100

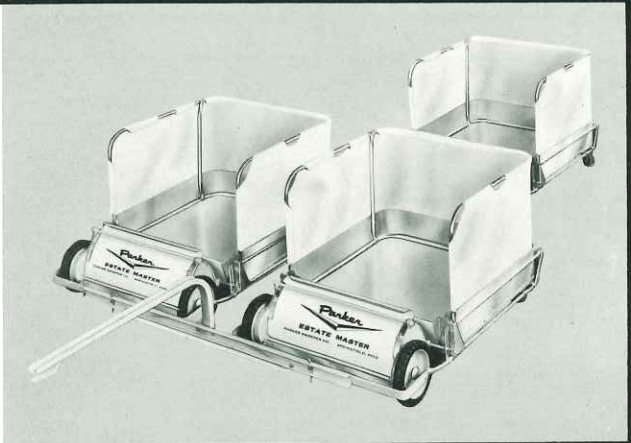

**THATCHERS—E-Z RAKE**

Model 105 has own 4-horsepower air-cooled engine for driving thatcher. Model 100 is driven off tractor's front pto. Both are front-mounted, have 37½-inch raking width, 100 rubber-sleeved spring tines, two 5-inch casters to carry rake when in operating position. Rake cylinder speed is 470 rpm.

Manufactured by E-Z RAKE, INCORPORATED  
1001 S. RANDELL ROAD, LEBANON, INDIANA

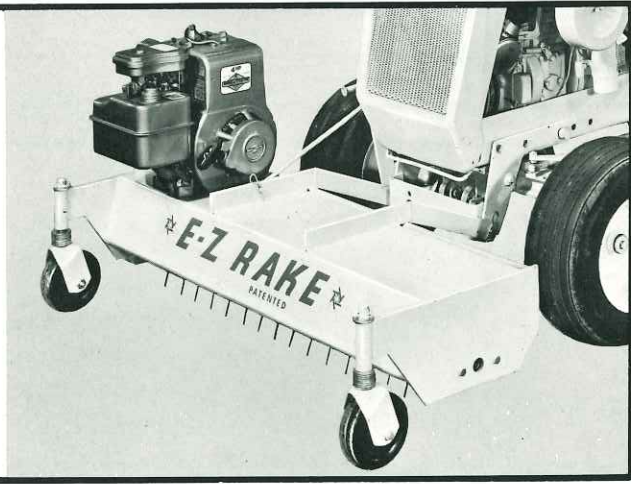

**ROTARY SWEEPER—JENKINS**

Front-mounted broom is driven off front pto with V-belts. 4-ft. wide, 26-in. dia. Cleans path 42-in. wide, angles 31° to right. Brush speed 150-300 rpm. Long-life bristles of Palmyra fiber. Tractor lift lever raises broom 8 inches. Brush pressure controlled by spring tension. Attach quickly, securely with 4 bolts. Tractor equipment required: front PTO implement clutch.

Manufactured by JENKINS EQUIPMENT CO., INC.  
DEXTER, MICHIGAN 48130  
Order Model No. C-48





# GARDENING


## MOLDBOARD PLOW\*—BRINLY-HARDY

10-in. moldboard plow. Recommended plowing depth is 5 in. Depth easily set by turnbuckle screw. 10-in. rolling coulter. Raised, lowered by tractor lift lever. Tractor equipment required: 3-point hitch.

Manufactured by BRINLY-HARDY COMPANY  
340 EAST MAIN STREET, LOUISVILLE, KENTUCKY 40202

Order Model No. PP 100

\*Requires Brinly-Hardy 3 pt. implement hitch  
Model HH 101 in addition to tractor 3 pt. hitch.

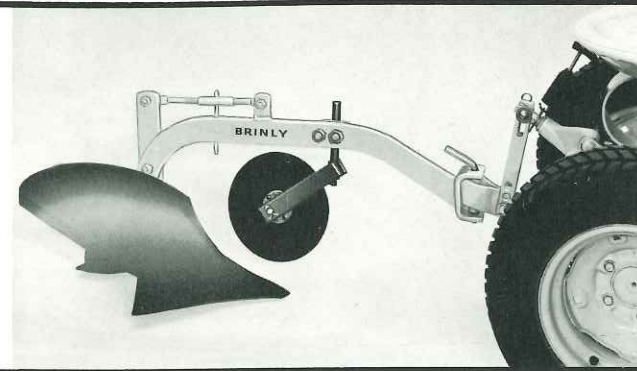


## DISK HARROW\*—BRINLY-HARDY

Rear-mounted single-section disk harrow adjusts to cut at 10, 15, or 20-degree angle. Works a 29 to 39-in. width, depending on angle. Eight, 11-in. diameter, heat-treated hi-carbon blades. Raised, lowered by tractor lift lever. Trailing tandem disk harrow formed by adding rear gang. Width between gangs adjustable 1 to 14-in. for straddle row cultivation. Tractor equipment required: 3-point hitch.

Manufactured by BRINLY-HARDY COMPANY  
340 EAST MAIN STREET, LOUISVILLE, KENTUCKY 40202

For Single Disk: Order Model No. DD 100  
For Tandem Disk: Order Model No. DD 100 and DD 101

\*Requires Brinly-Hardy 3 pt. implement hitch  
Model HH 101 in addition to tractor 3 pt. hitch.

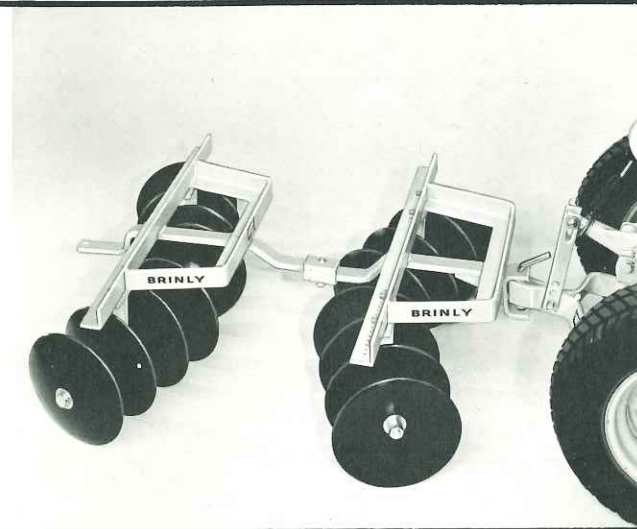


## DISK HARROW—PLANET JR.

Rear-mounted, single-section disk harrow. Two gangs, each with four 12-in. hardened and tempered steel disks mounted on self-oiling wood bearings. Four-inch spacing. Complete range of adjustments for hilling, bedding, or cultivating. Tractor equipment required: 3-point hitch.

Manufactured by S. L. ALLEN & CO., INC.  
5TH AND GLENWOOD AVENUE, PHILADELPHIA, PA. 19140

Order Model No. 0-62

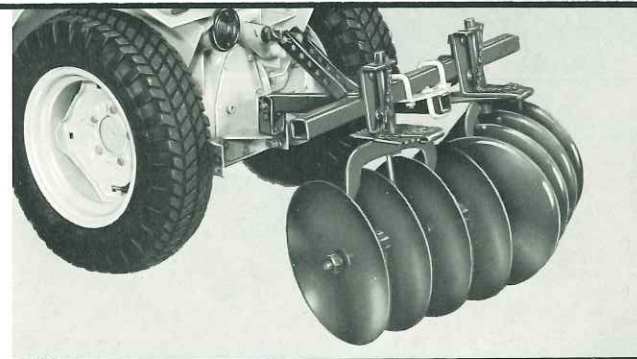


## PLANTER—PLANET JR.

Rear-mounted with precision die cast feeding mechanism. Detachable hopper, three seeding plates. Covers, opening plows, and heavy concave rollers with spring-activated scraper. Adjustable to allow planting of rows from 12 in. to 30 in. apart. Tractor equipment required: 3-point hitch.

Manufactured by S. L. ALLEN & CO., INC.  
5TH AND GLENWOOD AVENUE, PHILADELPHIA, PA. 19140

One-Row: Order Model No. 0-AB 34  
Two-Row: Order Model No. 0-AB 35

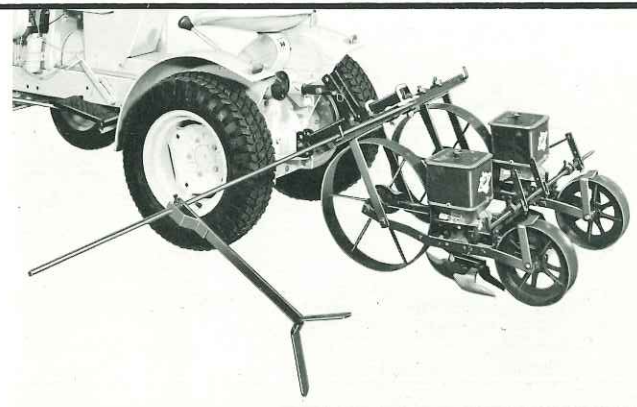


# GARDENING (Continued)

## CULTIVATOR—PLANET JR.

Rear-mounted. Cultivates straddle or between the row. Consists of 26-in. swivel bar, offset right- and left-hand tool bars, clamps, standards, reversible cultivator steels, adjustable gauge wheels, rear cross-tool bar with 12-in. sweep for full-width depth control. Tractor, equipment required: 3-point hitch.

Manufactured by S. L. ALLEN & CO., INC.  
5TH AND GLENWOOD AVENUE, PHILADELPHIA, PA. 19140

Order Model No. O-12

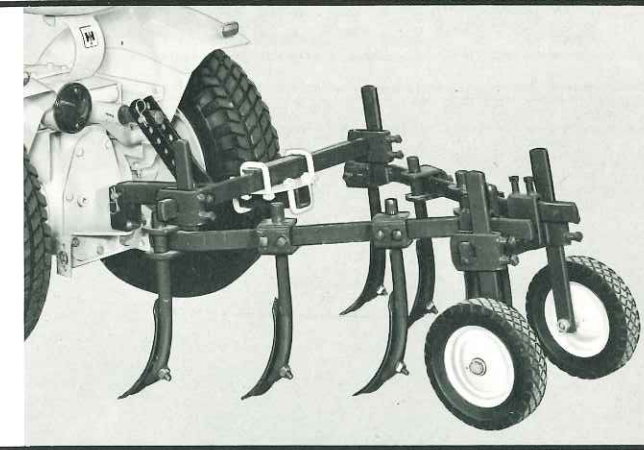


## CULTIVATOR—BRINLY-HARDY

Rear-mounted, adjusts to fit 6 to 42-in. row crop spacings. Depth controlled by two adjustable rubber-tired gauge wheels. 1½-in. x 8-in. reversible hi-carbon shovels. Raised, lowered by tractor implement lift lever. Weight box. Attachments available. Tractor equipment required: 3-point hitch and Brinly-Hardy 3-pt. implement hitch number HH101.

Manufactured by BRINLY-HARDY COMPANY  
340 EAST MAIN STREET, LOUISVILLE, KENTUCKY 40202

Order Model No. CC 500

For Tool Bar Model, Order Model No. TB 100

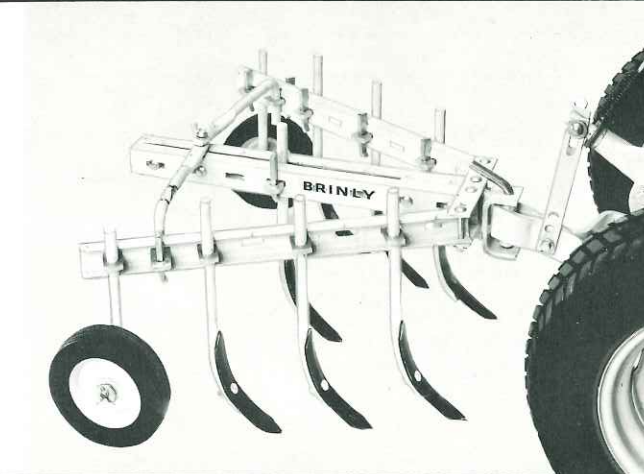


## ROLLING SPIKE HARROW—BRINLY-HARDY

Smoothing harrow with rotating spikes for final seedbed preparation, covering and firming seeded fields and early cultivation. 41 in. wide. High carbon steel frame, with welded spikes. Chain coupling attachment and hitch bar included.

Manufactured by BRINLY-HARDY COMPANY  
340 EAST MAIN STREET, LOUISVILLE, KENTUCKY 40202

Order Model No. SS 100

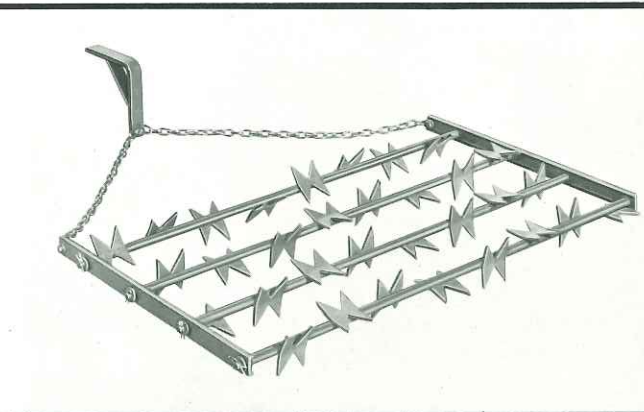




## SPREADER-SEEDER

### ROLLER BLADE—VIKING

Versatile roller blade with seeder. Grades, levels, mulches, and distributes seed. Grid-type roller leaves a distinctive soil pattern to absorb rainfall, resist erosion. By use of the slicing attachment, this machine can be used to aerate, fertilize, and overseed existing lawns. Roller blade width is 36 in. Width of seeder is 30 in.

Manufactured by VIKING MANUFACTURING COMPANY  
MANHATTAN, KANSAS 66502

Order Model No. 33

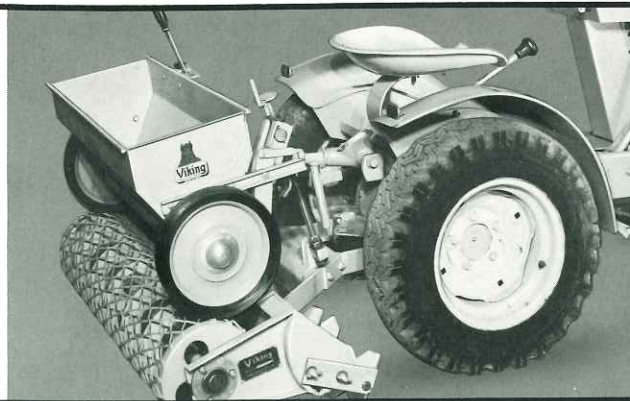

### SEEDER-FERTILIZER DISTRIBUTOR—PARKER

30-in. wide, with 85-lb. capacity hopper. Force feed flow provided by cam-action agitator. Hand lever starts and stops flow. Calibrated dial controls rate of application. Removable, easily cleaned shutter slide. Adjustable baffle plate prevents bridging.

Manufactured by PARKER SWEEPER COMPANY  
SPRINGFIELD, OHIO




### SPREADER-SEEDER—CYCLONE

Spreads up to 10-ft. wide with pelleted fertilizer. Patented design assures extremely uniform spreading—as little as 4-oz. of some granular pesticides—as much as 40-lbs. of some fertilizers per 1000-sq. ft. On-off feed control, "Micro-dial" rate control, 12-5 x 4.50 pneumatic tires. Capacity: 100-lbs. Order Model No. 99

Front-mounted unit with 1-bu. capacity, electric motor which operates from tractor electrical system and spreads up to 30-ft. also available. Order Model No. M-1A

Manufactured by THE CYCLONE SEEDER COMPANY, INC.  
URBANA, INDIANA 46990

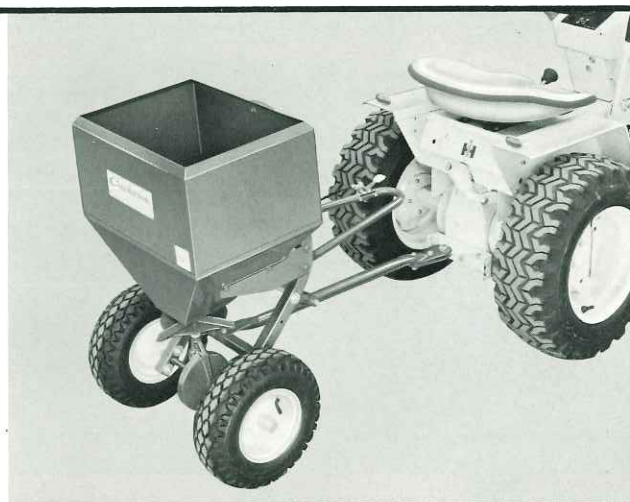

### SPREADER-SEEDER—BRINLY-HARDY

Fiberglass hopper has a 100-lb. or one-bushel capacity. Spreader mounts on tractor drawbar or on the Brinly 3-point hitch. Spreading width varying from 15 to 35 feet, depending on speed of motor, can be controlled by a rheostat (optional), and type of fertilizer. On-off switch and spreader setting lever can be reached from seat.

Manufactured by BRINLY-HARDY COMPANY  
340 EAST MAIN STREET, LOUISVILLE, KENTUCKY 40202  
Order Model No. FF 100




## FOGGING AND SPRAYING

### THERMO-FOGGER—BVI

BVI Thermo-Fogger delivers up to 5 gallons of oil-base insecticide per hour, converting each ounce into 2,000 cubic feet of fog. Briggs & Stratton 4-cycle, 3-hp gasoline engine. Positive on-off and variable speed controls. 3-gal. tank capacity. Mounted with 4 bolts.

Manufactured by BURGESS VIBROCRAFTERS, INC.  
GRAYSLAKE, ILLINOIS 60030

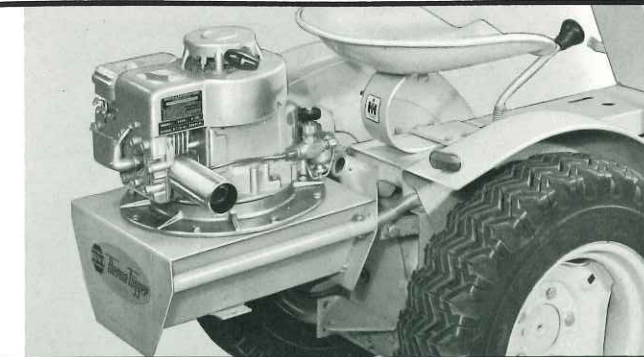

### BLITZ FOGGER—NORTHERN

One-quart capacity tank for fogging liquid fastens to hood of tractor. One neoprene hose carries liquid to engine muffler; the other pressurizes tank. The engine's exhaust expands the liquid to form a cloud of dry fog, the density of which is controlled by a needle valve at insecticide supply tank.

Manufactured by NORTHERN INDUSTRIES, INC.  
MILWAUKEE, WISCONSIN


Order "Estate" Model



### SPRAYERS—HUDSON

12½-gallon spray with 1½-gpm pump (illustrated) and 50-gallon sprayer with 3-gpm handle any sprayable material. Use with spray gun or optional boom. Pulsation dampener. Welded copper-steel tank. 2-hp, 4-cycle engine. 20-ft. Spray-Proof holds an adjustable power gun.

Manufactured by H. D. HUDSON MANUFACTURING CO.  
589 EAST ILLINOIS STREET, CHICAGO, ILLINOIS 60611

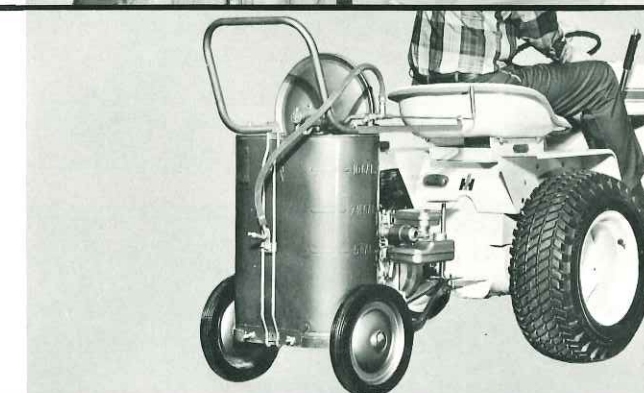

### SPRAYER—CENTURY

Fill any 10 to 55 gallon liquid container with spray solution and from one position spray a circle up to 65 feet in diameter. Adjust to high pressure for cleaning equipment, floors and gutters, or to fogging for insect control. Powered off front PTO.

Manufactured by CENTURY ENGINEERING CORP.  
CEDAR RAPIDS, IOWA



### CHEMICAL SPRAYER—MARS

3 flood-type nozzles give a 42-inch spraying width behind tractor. Pump is powered by friction drive wheel which contacts the inside of left rear tractor wheel and will not operate when tractor is in reverse. 5-gallon capacity. 10 p.s.i. spraying pressure.

Manufactured by MARS INDUSTRIES, INC.  
5209 W. BROADWAY, MINNEAPOLIS, MINNESOTA






# LANDSCAPING

## LOADERS—JOHNSON

Available with either manual or hydraulic control, Break-away load, 625 lbs.; load to top, 350-lbs.; maximum lift height cutting edge, 71.5-in. Rugged all-box construction. Ballast box is recommended for proper loader operation. 30-in., 36-in., and 48-in. material buckets and 30-in. tine bucket available as well as bucket adapters and boom.

Manufactured by JOHNSON HYDRAULIC EQUIPMENT CO.  
515 W. 78TH STREET, MINNEAPOLIS, MINNESOTA 55420

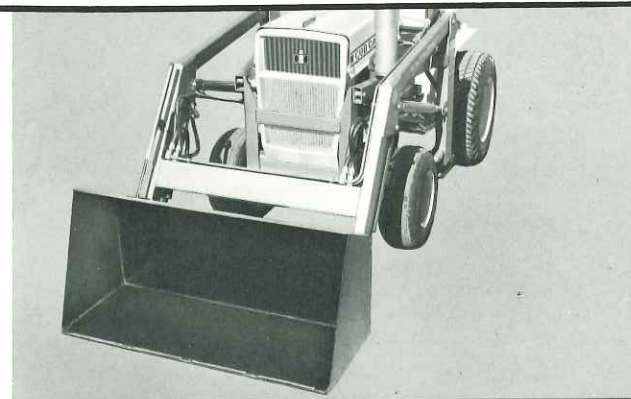

## LOADER—DANCO

Lifts 350-lb. loads. 52-in. lift height. 500-lb. breakaway. Raised and lowered hydraulically by two single-acting lift cylinders. 3-gpm front-mounted hydraulic pump. Hydraulic bucket control attachment. All-welded, formed steel box construction. Automatic bucket lock. 250-pound rear counterweight recommended. Weight, 300-lb. approx. Counterweight box, crane boom and fork lift attachments for loader also available.

Manufactured by DANUSER MACHINE WORKS, INC.  
P. O. BOX 15310, TULSA, OKLAHOMA 74115  
Order Model No. RD-1000



## GROUNDSAW TRENCHER—HAWK BILT

Mounts on 10 hp and 12 hp models. Digs to 24-, 30-, or 36-in. deep cutting a trench 2¼-, 3¼-, or 4-in. wide. 24-in. and 30-in. units also cut a 6-in. wide trench. Includes pump and hydraulic motor on trenching chain drive, and hydraulic boom depth control. Carbide-tipped teeth are welded to high-speed, high-tensile chain.

Manufactured by HAWK BILT MFG. CORP.  
VINTON, IOWA 52349

Order Model No. 1200

## HOLE DIGGER—DANUSER

Holes from 4 to 14 in. in diameter, up to 30 in. deep. Start and stop, raise and lower digger from driver's seat. Self-contained hydraulic system. Fabricated steel guide channel enclosing double V-belt drive. Replaceable, hardened cutting edges.

Manufactured by DANUSER MACHINE COMPANY  
500 E. THIRD STREET, FULTON, MO. 65251




# LANDSCAPING (Continued)

## MINI-SCRAPER—SOIL MOVER

9 cubic foot capacity, 36-inch wide cut, up to 3 inches deep. Scraper is hydraulically operated by two double-acting cylinders with hydraulic power supply provided by special hydraulic lift attachment. "Pan" is raised vertically for dumping. Front panel can be added to front end of scraper to convert to utility cart. Tractor equipment required: hydraulic lift attachment with changes in hydraulic lines.


Manufactured by SOIL MOVER CORPORATION  
COLUMBUS, NEBRASKA 68601

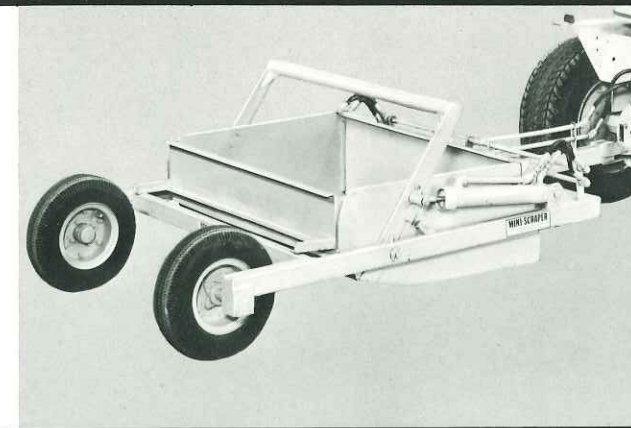

## SCOOP—NEMCO

Scoop has 2 cubic foot capacity and 17½-inch wide cutting edge. It mounts on the tractor's 3-pt. hitch and depth of cut is controlled by hitch lift lever. Payload is dumped or spread from scoop by a trip lever controlled from tractor seat. Tractor equipment required: 3-pt. hitch and a helper spring.


Manufactured by  
NENA ENGINEERING AND MANUFACTURING  
EDEN PRAIRIE, MINNESOTA

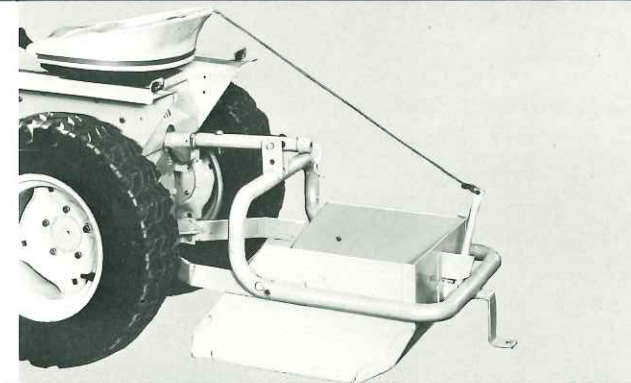

## CENTER-MOUNTED "TERRA-BLADE"—JOHNSON

¾"x6" high-carbon grader blade is available in 42 or 50-inch lengths and may be mounted or removed in minutes. Three positions: straight, or 20 degrees right or left. Optional handle available for height control.

Manufactured by  
JOHNSON HYDRAULIC EQUIPMENT COMPANY  
215 WEST 78th STREET, MINNEAPOLIS, MINNESOTA 55420

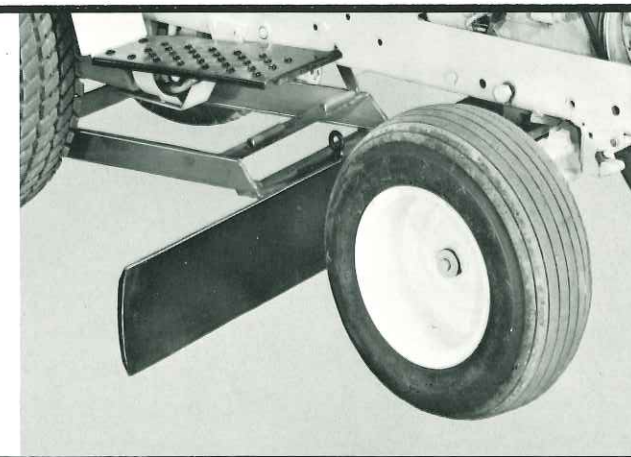

## PERFORMANCE AND WARRANTY OF SPECIAL DUTY EQUIPMENT

The "Special Duty Equipment" illustrated on pages 2 through 15 can be used with all numbered Cub Cadet tractors, including this year's new models and models from previous years. The method of mounting and using Special Duty Equipment on International Cub Cadet tractors is accepted by International Harvester Company and

will not affect the warranties of the tractors. Performance and warranty of the equipment are the responsibilities of its manufacturer. International Harvester disclaims any liability for injuries to persons or damage to property resulting from or arising out of the use of such equipment.




## UTILITY

### GENERATOR — PIONEER

Front mounted and driven off the tractor front pto clutch. Serves as emergency source for lights, pumps, blowers, burners, etc. and operates wherever your tractor goes.

Manufactured by PIONEER GEN-E-MOTOR CORPORATION  
5845 W. DICKENS AVENUE, CHICAGO, ILLINOIS 60639

Order Model: GB 1000 H	1000 watt	115 volts
GB RF 2500	2500 watt	115 volts
GB RF 2500 HDV	2500 watt	115-230 volts
GB RF 3500 H	3500 watt	115 volts
GB RF 3500 HDV	3500 watt	115-230 volts

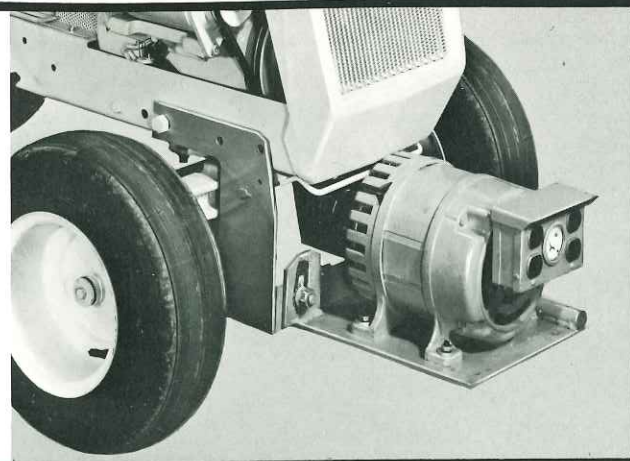


### ALTERNATOR — GENERAC

Two models available for all numbered Cub Cadet tractors. Operates electrical equipment such as portable saws, drills and other hand tools, or serves as emergency electrical source. Both models have two 115-volt polarized receptacles; 5345 has 230-volt twist-lock receptacle.

Manufactured by GENERAL CORPORATION  
BOX 8, WAUKESHA, WISCONSIN

Order Model: 5344	2000 watt	115 volts
5345	4000 watt	115-230 volts

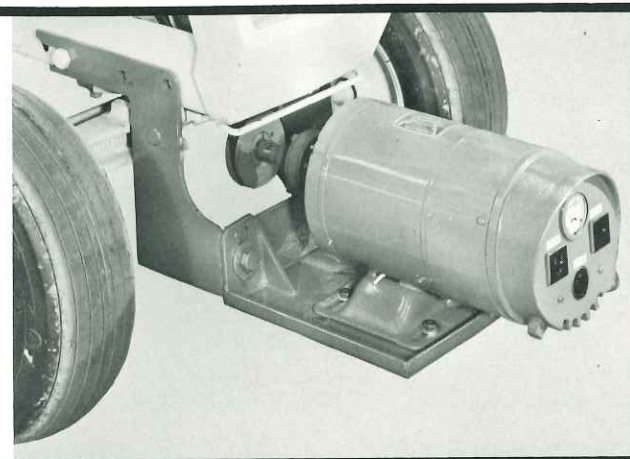


### FLOOR SWEEPER — LAMBERT

Trailing floor sweeper, including 9-in. gutter brush, sweeps a 37-inch path. Sweeper is powered by an independent 2¼-hp air-cooled gasoline engine. Brushes are driven through a centrifugal clutch and V-belt.

Manufactured by LAMBERT, INCORPORATED  
DAYTON, OHIO

Order Model No. GP-37B

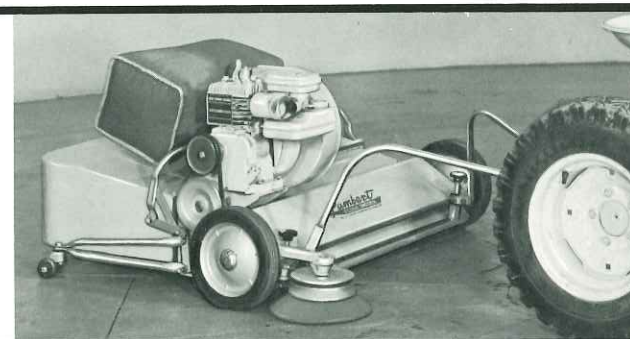

### UTILITY CARRYALL — JENKINS

Handy in-plant utility transportation for goods and people. Fiberglass body mounts two upholstered seats and provides space for carrying tools, cases, etc. Overall width is 44-in., height to top of seat is 26-in. Unit does not interfere with use of front or center mounted equipment.

Manufactured by JENKINS EQUIPMENT CO., INC.  
DEXTER, MICHIGAN 48130



## UTILITY (Continued)

### ALL-WEATHER CAB — COZY CAB

Welded and bolted construction with safety windshield and plexi-glass back and side window. Doors remove for summer use and frame serves as a roll bar. Seat belt. Electric wiper. 31-in. wide, 34-in. long, 54-in. high.

Manufactured by COZY CAB, LAWN & GARDEN DIV.  
LITCHFIELD, MINNESOTA

Order Model No. I.H.C. Cadet (Give year and model no.)



### OPERATOR'S CAB — WINDBREAKER

All-weather enclosure for Cub Cadet . . . use top and frame only in summer, full enclosure in winter. Made of heavy 12-oz. canvas with double locked seams, brass-plated grommets. Steel frame, rigid plastic in windshield, flexible plastic in side windows, distortion-free.


Sold Exclusively by IH DEALERS



### UMBRELLA — SNOW

Smart yellow and white "Sun-brella" with fringed edge wards off summer sun. Long-lasting, double-stitched cover, 54 in. square. Zinc-plated, rust-resistant 1¼-in. steel tubing shaft. Easy to install, or remove.


Manufactured by THE SNOW COMPANY  
OMAHA, NEBRASKA

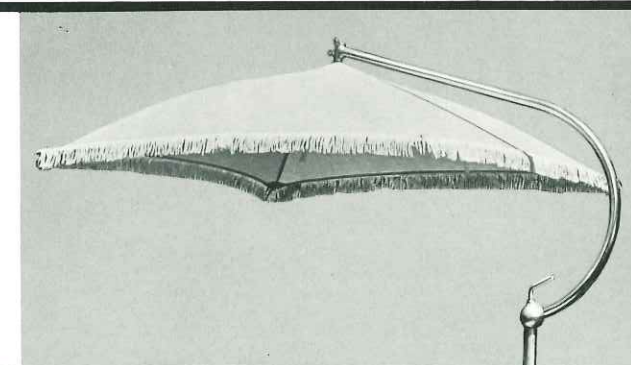

### GOLF BALL RETRIEVER — WITTEK

Width from 3½-ft. to 18-ft. Cushion-wedge "pick-up" assures longer life of ball dimples, protection against injury. Single-caster, wheel drawn bar design with 1000-lb. test, 4-ply, pneumatic tire. Ball guides may be raised or lowered to suit terrain.

Manufactured by WITTEK GOLF RANGE SUPPLY CO., INC.  
3650 NORTH AVONDALE AVE., CHICAGO, ILLINOIS 60618

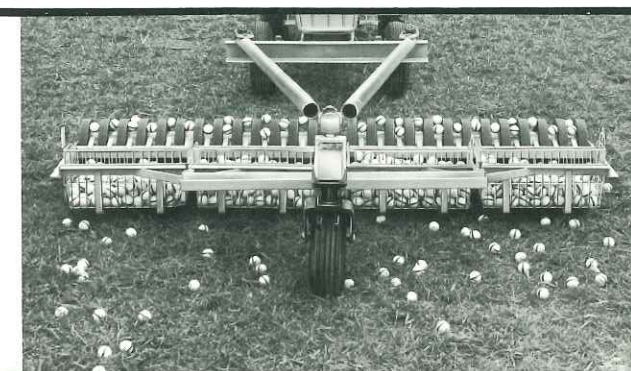



# QUICK-ATTACH IMPLEMENTS ATTACH OR DETACH IN SECONDS!

NEW THIS YEAR! IH offers an extensive line of Quick-Attach implements in addition to those illustrated on previous pages. Ask your dealer about the International tilt-bed trailer, interchangeable rear-mounted rake and blade, carrying trailer, box scraper, rear-mounted rotary tiller, rotary mowers, snow throwers and front-mounted spring-trip blade. Put your Cub Cadet tractor to work all year around!



**INTERNATIONAL ROTARY MOWERS**—38-in., 42-in., 48-in., wide. Three free-swinging blades cut a velvet green swath with a minimum of hand-clipping necessary. Spindles mounted on tapered roller bearings. V-belt drive from engine-mounted pto. Cutting action controlled by independent pto clutch actuated by lever. Cutting range: 1 to 4 inches.



**INTERNATIONAL Snow Throwers QA-36 and QA-42**—36-in. and 42-in. wide. Clear snow fast and easily with International Snow Throwers. Direction controlled from driver's seat. Throw snow up to 20 feet—in 180° arc.

**INTERNATIONAL SPRING-TRIP BLADE.** Plow snow, level and grade with 42-in. wide, 16-in. high blade. Angles 10, 20 or 30 degrees left or right if desired. Safety spring trip releases blade if obstacle is struck. Adjustable gauge-skid shoes protect cutting edge against wear.



## POWER UP NOW...PAY UP LATER

### INTERNATIONAL HARVESTER CREDIT CORPORATION

DEFERRED BALANCE	12 months mo. pay't.	18 months mo. pay't.	24 months mo. pay't.	DEFERRED BALANCE	12 months mo. pay't.	18 months mo. pay't.	24 months mo. pay't.
\$500.00	\$44.48	\$30.59	\$23.65	\$700.00	\$62.27	\$42.83	\$33.10
550.00	48.93	33.65	26.01	750.00	66.72	45.89	35.46
600.00	53.38	36.71	28.38	800.00	71.17	48.94	37.83
650.00	57.83	39.77	30.74	Applicable in all states except Ark. and Neb.			

Specifications subject to change without notice

**IH** INTERNATIONAL HARVESTER COMPANY  
CHICAGO, ILLINOIS